


User Manual for Refillable Compatible Ink Cartridge

Mimaki JV33 Series

! Caution: Please use a sharp end to penetrate the sealing film before installing cartridge onto the printer.

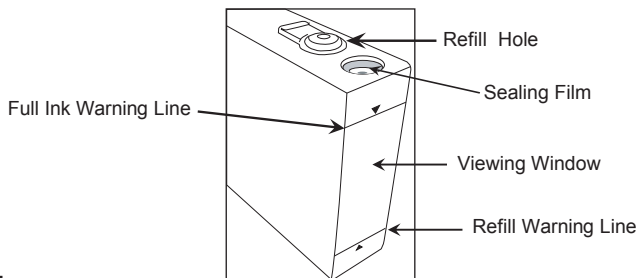

I. INSTALLATION

1. Remove the used/empty cartridge from printer according to the printer user manual.
2. Please use a sharp end to penetrate the sealing film before installing cartridge.
3. Install the new cartridge onto the printer. The indicator light of the printer will turn green.
4. When '<LOCAL.1>' is displayed on the panel of printer, you can conduct the normal printing process.

NOTE

Please read it carefully before any action!

1. Please check regularly on the ink consumption of cartridge from the transparent Viewing Window. Once the ink level goes below the Refill Warning Line, please replace or refill the cartridge.
2. Any removing and installing operation for the cartridge or turning on and off printer will make the ink measurement of the chip to be reset as full. So, the ink level shown on printer panel sometimes may not indicate the real ink consumption. Thus, you are suggested to check ink level visually.

II. REFILLING

1. Unplug the rubber plug from the Refill Hole, then, use a refill kit (e.g. funnel, large-sized syringe, etc) to fill the ink into the cartridge (Fig.1). Please unplug the rubber plug gently when refilling the ink, or else the ink on the plug will spill out and pollute the surroundings.
2. While refilling ink into the cartridge, please pay attention to ink level displayed on the Viewing Window of the cartridge. Please stop filling when the ink level reaches the Full Ink Warning Line.
3. Use tissues to wipe off the residual ink around Refill Hole, and reset the rubber plug.
4. You are ready for printing again!

